

TECHNICAL CHARACTERISTICS

1. General Characteristics

Dimensions: 28.70L x 17.50W x 1.50H mm
28.70L x 17.50W x 2.00H mm

Weight: Approx. 0.70 g

Contact principle: Friction technology

Operating position: Shaft up / Down / Horizontal

Mounting System: SMT Type (with post)

Durability: 100,000 cycles min.

2. Mechanical Characteristics

Insulation material: Thermoplastic, UL 94V-0

RoHS Directive 2011/65/EU Compliant

3. Electrical Characteristics

Number of contacts: 8 pins

Contact resistance: 50 mΩ typical, 100 mΩ max.

Insulation resistance: >1000 MΩ / 500 VDC

Switch type: Blade

Operation: Normally Open

4. Solderability

Wave: Not applicable

IR reflow: 260°C, 10 sec. Max.

Manual soldering: 360°C, 3 sec. Max.


5. Environmental Characteristics

Operating temperature: - 40°C ~ + 85°C

Operating humidity: 10 % ~ 95 % RH

Storage temperature: - 40°C ~ + 85°C


Storage humidity: 10 % ~ 95 % RH

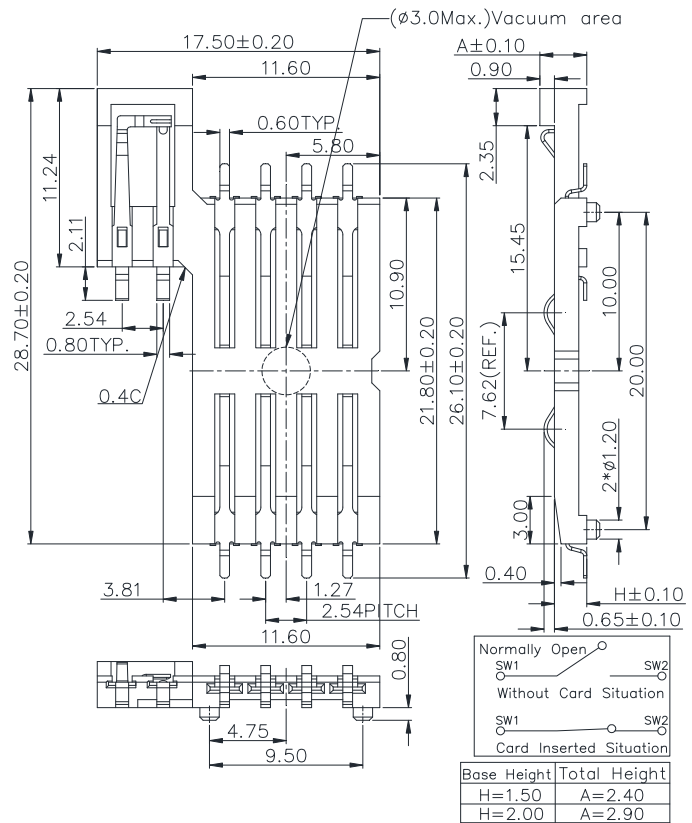

Recommend card slot height: 1.0 mm

※Metal switch can't be touched. Must keep 0.1 mm min. gap above switch.

Unit: mm; Tolerances: ±0.15 mm
Mechanical outline dimension

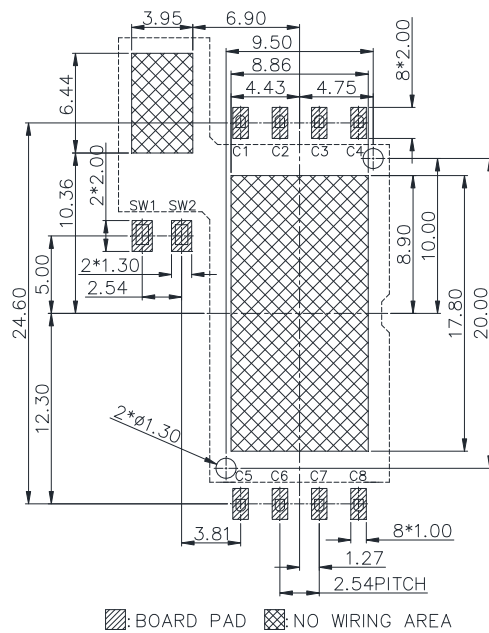

Unit: mm; Tolerances: ±0.05 mm
Reference dimension for PCB layout

Note:

1. Coplanarity of solder pins 0.10mm max.
2. Recommended thickness of solder paste > 0.15mm.

H&V Smart Card Connector

Model No.: ICC-306 Type2

Revision: 2.3 Date: APR. 08, 2015

For further information, please contact:

Tel: +886 2 2662 8882(Rep.) Fax: +886 2 2662 7201-2 E-mail: taipei@hamburg.com.tw URL: <http://www.hamburg.com.tw>